



Proudly Distributed in Australia by The Clean Air Company (Master Distributors), a subsidiary of Airius Asia Pacific



WE ARE RGF®


The PHI-MSP Mini Split Air Purification System

The PHI-MSP mini split air purification system uses RGF's patented Photohydroionization® (PHI-CELL®) technology to reduce airborne and surface bacteria, viruses, odors, and mold spores.

The PHI-MSP is easily mounted onto mini split AC units without modification by using hook-and-loop adhesive strips. The PHI-MSP incorporates its own pull out reusable germicidal filter and installs into any 100-277 VAC power supply.



UV-C LIGHT



H₂O₂



Proven Effective at Eliminating Surface Based and Airborne SARS COV-2 (COVID 19) Virus from internal spaces

Ideal for use in:



CLASSROOMS



DAYCARES



CONFERENCE ROOMS



RESTAURANTS



HOTELS




BOATS



LOCKER ROOMS



OFFICES

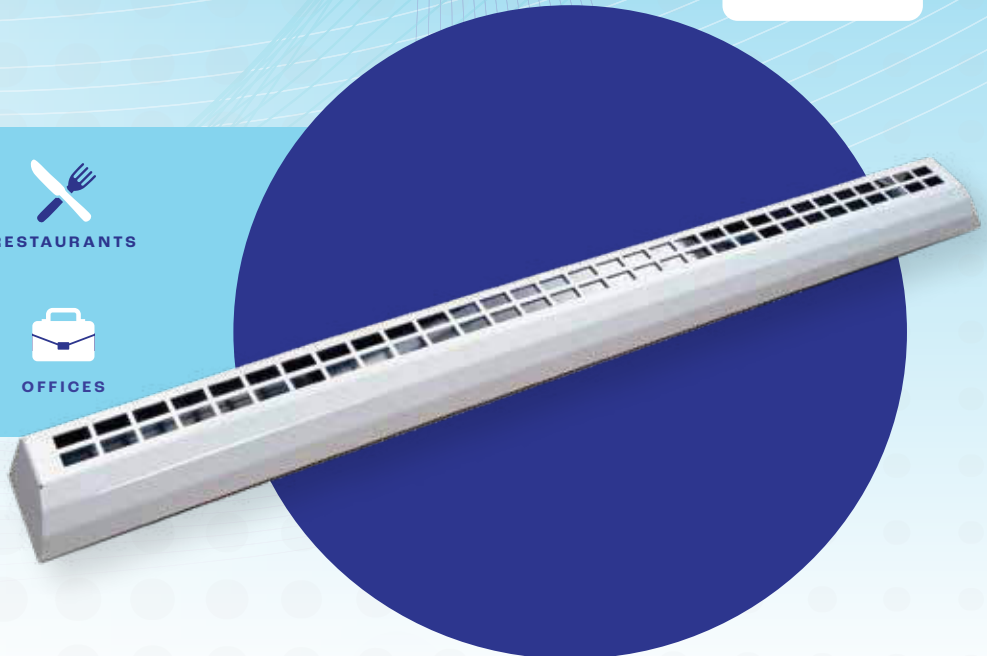

Airius Asia Pacific Pty Ltd | The Clean Air Company
PO Box 1812, Byron Bay, NSW 2481
Email: info@cleanairco.com.au
Website: www.airius.com.au | www.cleanairco.com.au




Why Use RGF's PHI-CELL® Technology?

Photohydroionization® (PHI) is an active air treatment technology. Active air treatment is the process of reducing air and surface contaminants by recreating safe, natural levels of hydrogen peroxide (H₂O₂) in occupied areas.

RGF's patented PHI-CELL® technology combines a photocatalytic process and a multiwavelength UV source to create active air purification. The combination of UV light and a hydrated quad-metallic catalyst drives a reaction that produces low level, airborne H₂O₂. RGF's PHI-CELL® air treatment systems are operating safely in over four million installations globally.

PHI-MSP Mini Split Air Purification System

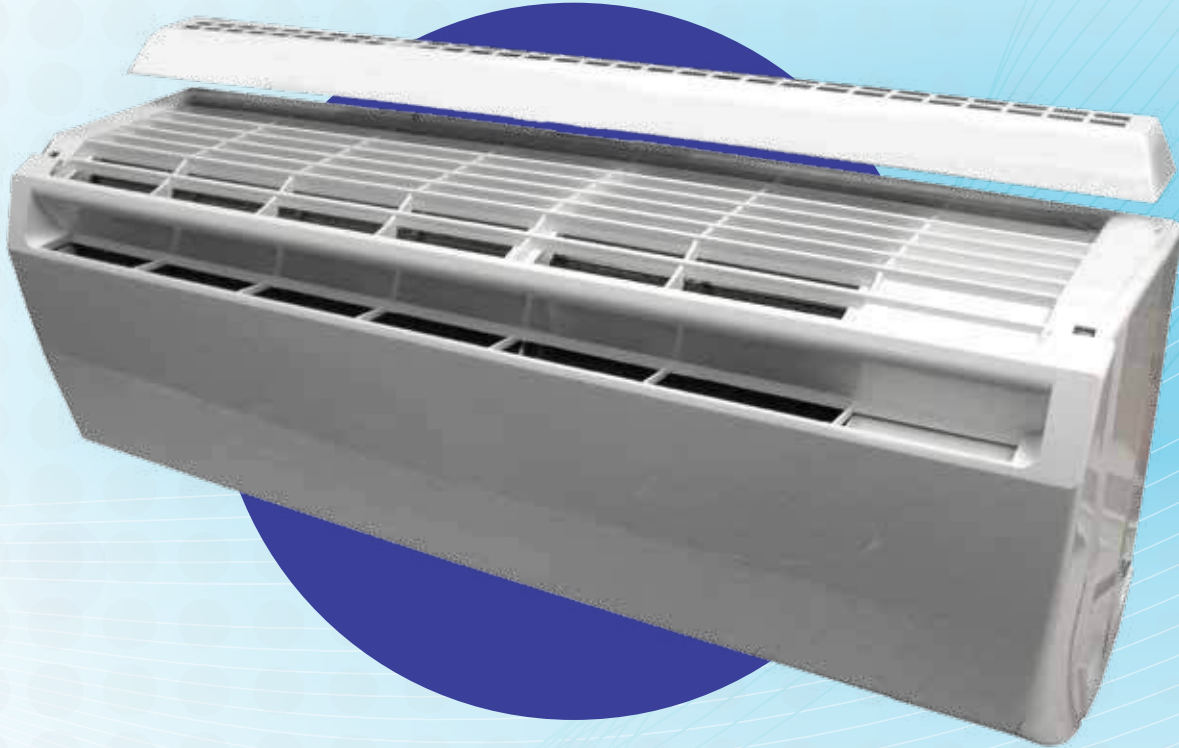

ITEM#	REPLACEMENT CELL	ELECTRICAL	WATTS	DIMENSIONS	SHIP WT.
MINI SPLIT-HVAC-PHI-110	PHIC-5MS-GA	110 VAC	13.2	30"W x 1.25"H x 2.5"D	3 lbs.
MINI SPLIT-HVAC-PHI-230	PHIC-5MS-GA	230 VAC	9	762mm x 31.8mm x 63.5mm	1.36 kg.

MATERIALS

Aluminum / Polymers

HVAC BLOWER SIZE

250 – 2,000 CFM (424.75 m³/h – 3398.02 m³/h)

CELL REPLACEMENT

Recommended after 2 years

WARRANTY

2 year U.S. and Canada
(1 year international)



UL 1598:2008 (3rd Edition)
CAN/CSA C22.2
No.250.0:2008

